

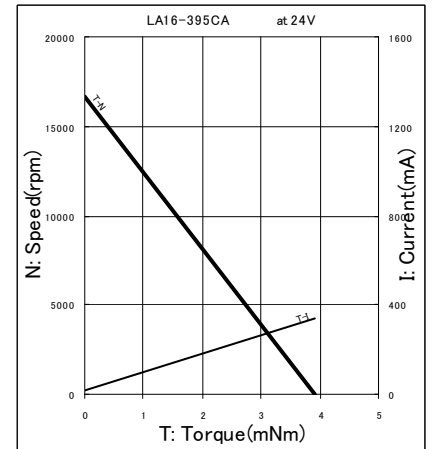


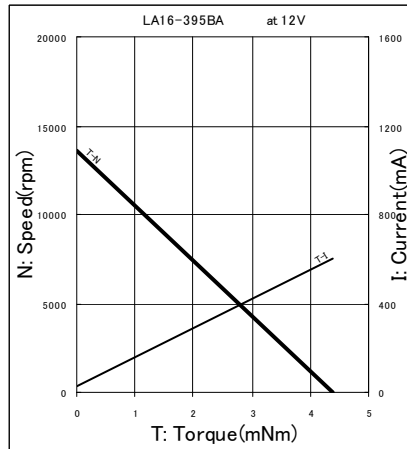


- Voltage variation (6V, 12V, 24V)
- RoHS Compliant

Model	Rated Voltage Vdc	Rated Current mA	Stall Current mA	Rated Torque		Stall Torque		Rated Speed rpm	No Load Speed rpm
				oz-in	mNm	oz-in	mNm		
LA16-395AA	6	320	1250	0.007	0.98	0.034	4.4	11000	13600
LA16-395BA	12	160	600	0.028	0.98	0.088	4.7	11000	13600
LA16-395CA	24	100	340	0.005	0.98	0.072	3.92	12500	16600

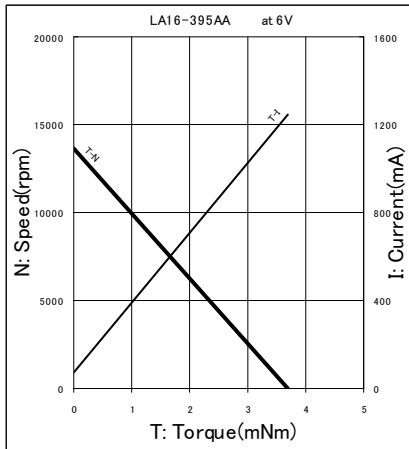

Outline Dimensions (mm)

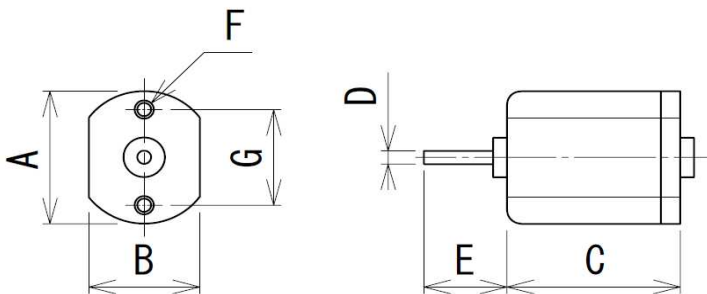

Model	A	B	C	D	E	F	G
All	φ 16	14.6	20	φ 1.5	3.6	M1.6	10.4

Nidec Copal (U.S.A.) Corp.

373 Van Ness Ave Suite 130

Torrance, CA 90501

Tel: (310) 782-6102

Fax: (310) 782-6821

www.nidec-copal-usa.com

info@nidec-copal-usa.com