





- RoHS Compliant
- Can be customized with connectors, leadwires, spur gears

Model	Rated Voltage Vdc	Rated Current mA	Stall Current mA	Rated Torque		Stall Torque		Rated Speed rpm	No Load Speed rpm
				oz-in	mNm	oz-in	mNm		
LA6-414EB	2.2	90	470	0.003	0.02	0.022	0.16	46000	53000

Outline Dimensions (mm)

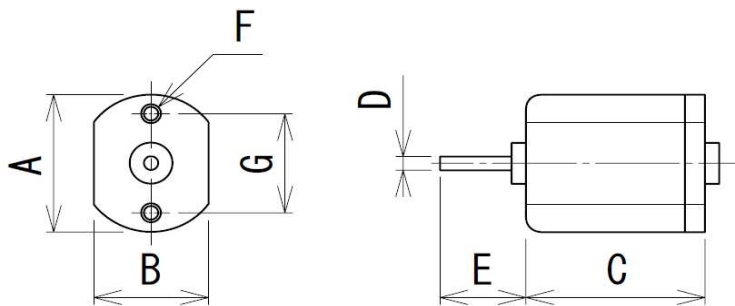

Model	A	B	C	D	E	F	G
LA6-414EB	φ 6	5.2	9.5	φ 0.8	5.6		

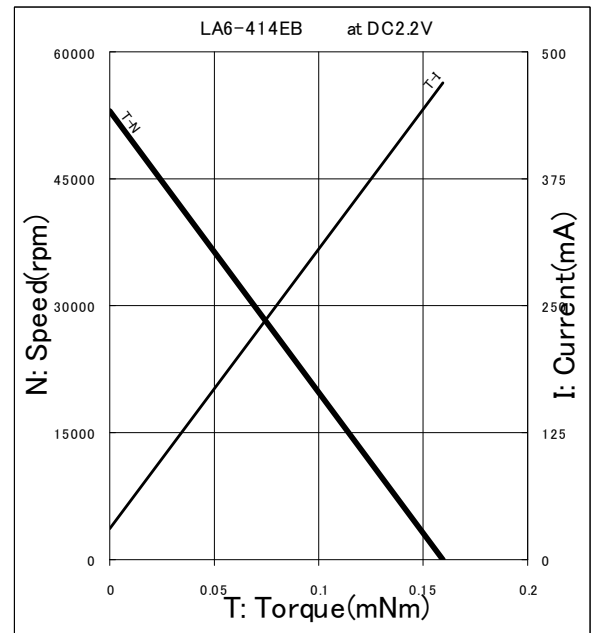

Nidec Copal (U.S.A.) Corp.

373 Van Ness Ave Suite 130

Torrance, CA 90501

Tel: (310) 782-6102

Fax: (310) 782-6821

www.nidec-copal-usa.com

info@nidec-copal-usa.com