

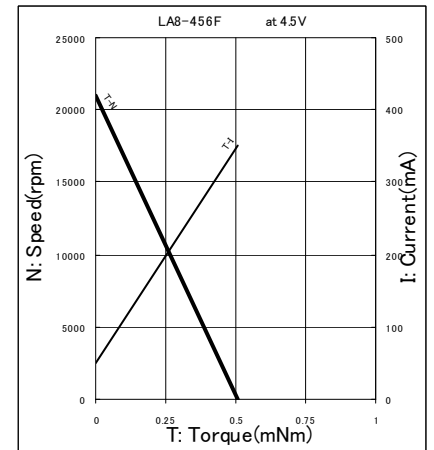


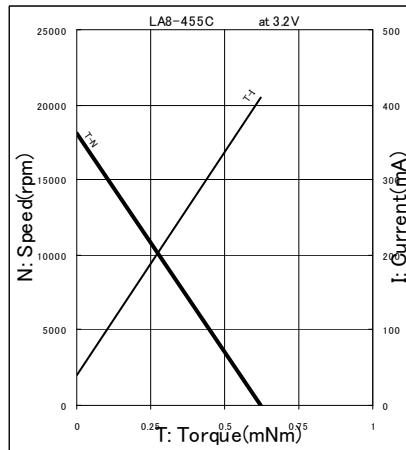


- Length variation (10mm, 14.5mm, 20mm)
- RoHS Compliant

Model	Rated Voltage Vdc	Rated Current mA	Stall Current mA	Rated Torque		Stall Torque		Rated Speed rpm	No Load Speed rpm
				oz-in	mNm	oz-in	mNm		
LA8-410B	3	90	260	0.007	0.049	0.034	0.24	19000	23450
LA8-455C	3.2	160	410	0.028	0.196	0.088	0.62	12450	18100
LA8-456F	4.5	70	350	0.005	0.037	0.072	0.51	19800	21050

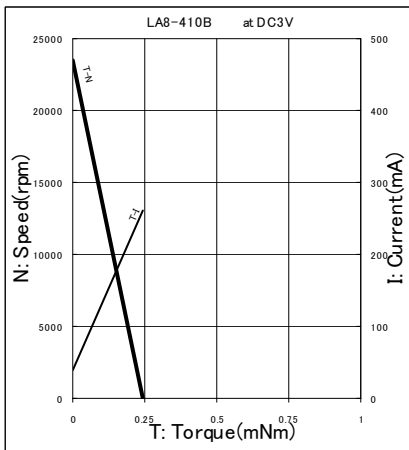

Outline Dimensions (mm)

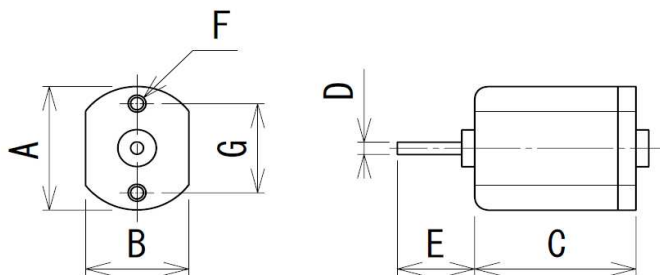

Model	A	B	C	D	E	F	G
LA8-410B	$\phi 8$	6.5	10	$\phi 1$	8.35	M1.2	5.4
LA8-455C	$\phi 8$	6	20	$\phi 1$	10.5	M1.2	5.4
LA8-456F	$\phi 8$	6	14.5	$\phi 1$	3.5	M1.2	5.4

Nidec Copal (U.S.A.) Corp.

373 Van Ness Ave Suite 130

Torrance, CA 90501

Tel: (310) 782-6102

Fax: (310) 782-6821

www.nidec-copal-usa.com

info@nidec-copal-usa.com