


COPAL


LB16MG-240-AB 16mm Brushless Motor Planetary Metal Gearbox 12Vdc, 240:1 Ratio

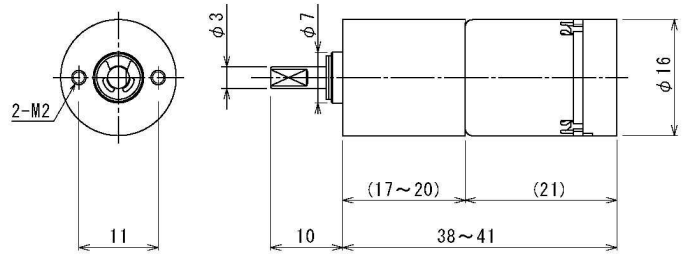

RoHS Compliant

Drive Electronics :Internal
 Gearbox :Planetary Metal Gears
 Bearing Type :Sleeve
 Rotation :CW; CCW
 Operating Temp :0°C~50°C
 Net Weight :33.5g

Model	Rated Voltage (Vdc)	Rated Current (mA)	Starting Current (mA)	Rated Torque		Starting Torque		Rated Speed (rpm)	No Load Speed (rpm)	Length (mm)
				oz-in	mNm	oz-in	mNm			
LB16MG-240-AB	12	200	1100	13.88	98	127.45	900	45	50	41

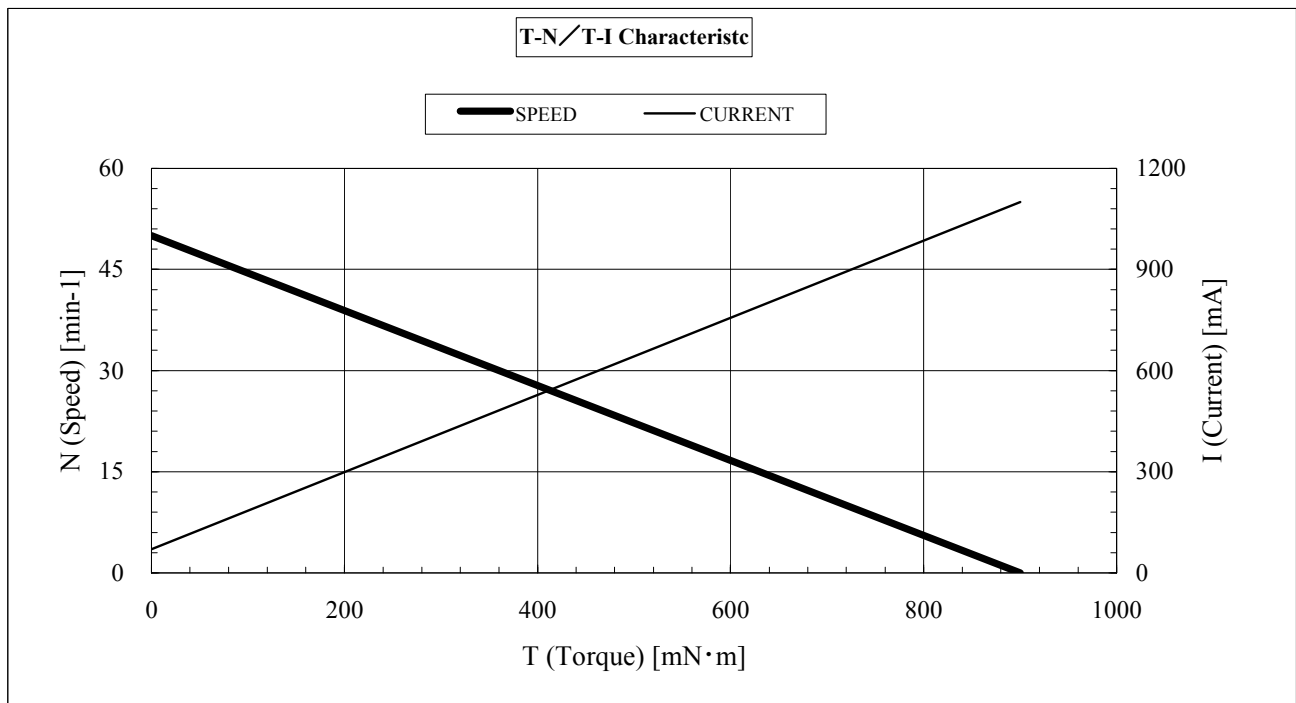

Input/Output Signal

Wire No.	Item	Standard	Wire Color
1	GND		Black
2	VM (motor power)	3.5 ~ 13.2VDC (Motor Speed Control)	Gray
3	Vcc (driver circuit)	12VDC: (10.8 ~13.2VDC)	Red
4	CW/CCW	CW: to Vcc; CCW: to GND	Green
5	FG	1024 P/R (Gear Ratio×4) Square wave signal	Yellow

Nidec Copal (U.S.A.) Corporation

373 Van Ness Ave Suite 130

Torrance, CA 90501

Tel: (310) 782-6102

Fax: (310) 782-6821

www.nidec-copal-usa.com

info@nidec-copal-usa.com